

Overhead Lighting for Crosswalks

Rectangular Rapid Flashing Beacon (RRFB) with Overhead Lighting Fixture



Overhead crosswalk lighting improves pedestrian safety by reducing all types of injury crashes by 23%*:

- ✔ Overhead fixture illuminates pedestrian and entire crosswalk area when activated
- ✔ Area/roadway-specific optic provides uniform illumination consistent with IES recommendations
- ✔ Meets FHWA and IES lighting standards for urban and rural crosswalks
- ✔ SC315-G RRFB system meets MUTCD requirements, including IA-21; Buy America compliant
- ✔ Audible pushbutton or passive pedestrian activation sensor options

Purpose-Built Fixture for Crosswalks**

Carmanah's overhead lighting solutions use a roadway-specific LED fixture that provides bright, directional, and uniform illumination of the entire crosswalk area. This optic creates a distribution pattern that is desirable not only for its ability to adequately light a pedestrian without causing glare to drivers, but the fixture design also minimizes glare to surrounding residences, reducing spilled light and wasted energy. The fixture is configured to turn on when the RRFB is activated.

Superior Design and Technology

Overhead lighting for crosswalks uses our trusted SC315-G cabinet-based RRFB system. This design enables the SC315-G to work with audible push button stations, passive activation sensors, and remote monitoring, as well as operate at higher intensities and increased activations in challenging environments. MUTCD interim approval IA-21 flash pattern and multiple configurations enable the SC315-G to handle all crosswalk applications.

Easy Installation

All components, including the battery and AC power supply, Energy Management System (EMS) and optional audible push button controller are housed in a compact, lockable, purpose-built enclosure. It also incorporates a wire routing and termination system, and all components are wired at the factory for an efficient installation.

Advanced User-Interface

The SC315-G comes with an on-board user interface for quick configuration and status monitoring. It allows for simple in-the-field adjustment of flash pattern, duration, intensity, ambient auto adjust, night dimming, and many more. Settings are automatically sent wirelessly to all units in the system.

* U.S. Department of Transportation Federal Highways Administration, Report No. FHWA-SA-17-072 - "Guide for Improving Pedestrian Safety at Uncontrolled Crossing Locations"

** A photometric layout (i.e. a professional lighting plan) should be completed for each location to determine the suitability of a selected luminaire and its placement/mounting height. Contact us for a photometric layout.



MUTCD
compliant



Buy America
compliant



5-year limited
warranty




Solar-sized for
every location



Overhead Lighting for Crosswalks

Rectangular Rapid Flashing Beacon (RRFB) with Overhead Lighting Fixture

1.844.412.8395 | traffic@carmanah.com | carmanah.com




FIXTURE SPECIFICATIONS	
LED Fixture	Cree® LED Street/Area Luminaire NanoOptic® Precision Delivery Grid™ optic delivers site-specific customization of light quality with increased lumens, improved uniformity ratios, and controlled high-angle brightness
	120-277V or 347-480V input voltage, 50/60Hz
Performance	Up to 11,875 initial delivered lumens Up to 125 lumens per watt (LPW) Minimum 70 CRI 4000K color temperature (CCT)
Optics	Type IV Medium (4ME)
Operation	Fixture operates in conjunction with crosswalk beacons (using on-board Energy Management System)
Mounting	Mounts on 1.25" (32mm) IP, 1.66" (42mm) O.D. or 2" (51mm) IP, 2.375" (60mm) O.D. horizontal tenons (minimum 8" [203mm] in length) Direct arm or Davit arm available for fixture mounting
Weight	14.2 lbs (6.4 kg)

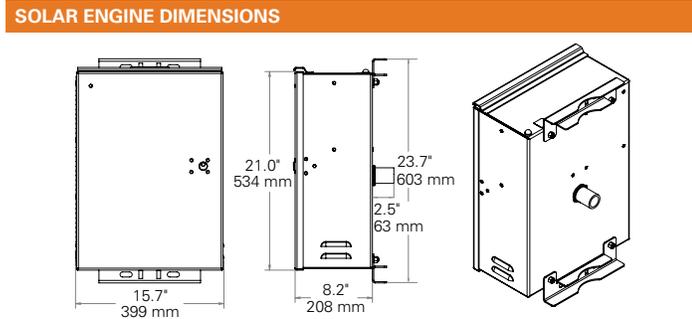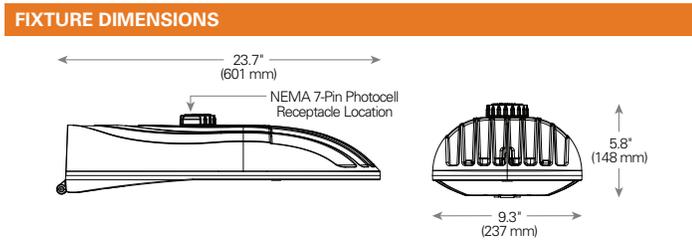

SOLAR PANELS AND MOUNTS		
3.5" - 4.5" Diameter Round Top of Pole Mount		Side of Pole Mount
PANEL*	LENGTH	WIDTH
50 W	26.3" (668 mm)	21.2" (538 mm)
80 W	30.7" (780 mm)	26.5" (672 mm)

* Carmanah will conduct a site assessment and provide an Solar Power Report™ to determine the correct solar panel and battery size.

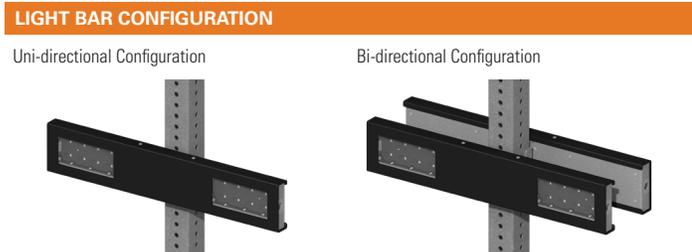

BEACON SPECIFICATIONS	
	MUTCD interim approval IA-21 and MUTCDC compliant
	Purpose-built light bar optics = maximum efficiency and no stray light Exceeds SAE J595 class 1 intensity by 2.5 to 3x when used as recommended Meets SAE J578 chromaticity
Optical	3 in (76 mm) x 7 in (178 mm) clear, UV-rated polycarbonate lens with yellow LEDs High-power LEDs: +90% lumen maintenance (L90) based on IES LM-80 Side-emitting pedestrian confirmation LEDs
	Independent, stainless steel mounting brackets make back-to-back installation simple and enable in-field aiming for maximum effectiveness
	Yellow, black, or green powder coated light bar covers
	Available with 2.4 GHz radio for remote activation of additional systems Wireless update of settings from any unit to all systems on the same radio channel User-selectable multiple channels to group different beacons and ensure a robust wireless signal
Beacon Communication	Communicates with all other Gen III radio-enabled systems including our R820-E, -F, and -G circular beacons Instantaneous wireless activation: <150 ms Wireless range: 1000 ft (305 m) Integrated, vandal-resistant antenna

SYSTEM SPECIFICATIONS	
	Adjustable system settings with auto-scrolling LED display on our latest EMS System test, status, and fault detection: battery, solar, button, beacon, radio, day/night
	Flash patterns: RFB1 (WWW+S), RFB2 (WSDOT), 0.5 sec. alternating (MUTCD), 0.5 sec. unison (MUTCD), 0.1 sec. unison, 0.25 sec. unison, 0.1 sec. x3 quick flashes unison, 0.1 sec. x3 quick flashes alternating
	Input: momentary for pushbutton activation, normally open switch, normally closed switch, dusk-to-dawn operation Flash duration (for beacons and overhead light): 5 sec. to 1 hr.
On-Board User Interface (OBU)	Intensity setting: 20 to 1400 mA for multiple RRFBs, circular beacons, or LED enhanced signs Nighttime dimming: 10 to 100% of daytime intensity Ambient Auto Adjust: increases intensity during bright daytime Automatic Light Control: reduces intensity if the battery is extremely low Temperature correction: yellow or red beacons Calendar: internal time clock function Radio settings: enable/disable, selectable channel from 1 to 14 Output: enabled when beacons flashing daytime and nighttime, or nighttime only E.g., for relay control of overhead lighting Activation counts and data reporting via OBU or optional USB connection
Power System	Solar or AC-powered AC: 100-240 VAC input, 6-14 AWG Replaceable AC-DC power supply, circuit breaker, terminal block wiring
Energy Collection	50 or 80 W high-efficiency photovoltaic solar panel 45 deg tilt for optimal energy collection Maximum Power Point Tracking with Temperature Compensation (MPPT-TC) battery charger for optimal energy collection in all solar and battery conditions
Energy Storage	12 V battery system with multiple sizes: 35, 55, 100 Ahr. Replaceable, recyclable, sealed, maintenance-free, best-in-class AGM batteries offer the widest temperature range and longest life Battery design life: +5 yrs.
Cabinet Construction	Weatherproof, gasketed enclosure with vents for ambient air transfer (NEMA 3R) Lockable, hinged door with #2 lock Optional padlockable latch Corrosion-resistant aluminum with stainless steel hardware Raw aluminum finish or yellow, black, or green powder coated Prewired to minimize installation time High-efficiency optics and EMS = the most compact, lightweight system
Environmental	-35 to 165° F (-37 to 74° C) system operating temperature -40 to 140° F (-40 to 60° C) battery operating temperature 150 mph (241 kph) wind speed as per AASHTO LTS-6
Activation	Push button: ADA-compliant, piezo-driven with visual LED and two-tone audible confirmation Audible push button station: ADA-compliant, piezo-driven with visual LED and customizable voice message confirmation Passive activation: microwave-based sensor detects pedestrian
Warranty	5-year limited warranty, 1-year limited on batteries

Specifications subject to local environmental conditions, and may be subject to change.

All Carmanah products are manufactured in facilities that are certified to ISO quality standards.

"Carmanah" and Carmanah logo are trademarks of Carmanah Technologies Corp.

© 2023, Carmanah Technologies Corp.

Document: Carmanah_DATA_SC315-G-OHL_RevC