

Overhead Lighting for Crosswalks

Rectangular Rapid Flashing Beacon (RRFB) with Overhead Lighting Fixture



Overhead crosswalk lighting improves pedestrian safety by reducing all types of injury crashes by 23%.*

- ✓ Overhead fixture illuminates pedestrian and entire crosswalk area when activated
- ✓ Area/roadway-specific optic provides uniform illumination consistent with IES recommendations
- ✓ Meets FHWA and IES lighting standards for urban and rural crosswalks
- ✓ SC315-G RRFB system meets MUTCD requirements, including IA-21; Buy America compliant
- ✓ Audible pushbutton or passive pedestrian activation sensor options

Purpose-Built Fixture for Crosswalks**

Carmanah's overhead lighting solutions use a roadway-specific LED fixture that provides bright, directional, and uniform illumination of the entire crosswalk area. This optic creates a distribution pattern that is desirable not only for its ability to adequately light a pedestrian without causing glare to drivers, but the fixture design also minimizes glare to surrounding residences, reducing spilled light and wasted energy. The fixture can be configured to turn on only when the RRFB is activated or to run continuously throughout the night.

Superior Design and Technology

Overhead lighting for crosswalks uses our trusted SC315-G cabinet-based RRFB system. This design enables the SC315-G to work with audible push button stations, passive activation sensors, and remote monitoring, as well as operate at higher intensities and increased activations in challenging environments. MUTCD interim approval IA-21 flash pattern and multiple configurations enable the SC315-G to handle all crosswalk applications.

Easy Installation

All components, including the battery and AC power supply, Energy Management System (EMS) and optional audible push button controller are housed in a compact, lockable, purpose-built enclosure. It also incorporates a wire routing and termination system, and all components are wired at the factory for an efficient installation.

Advanced User-Interface

The SC315-G comes with an on-board user interface for quick configuration and status monitoring. It allows for simple in-the-field adjustment of flash pattern, duration, intensity, ambient auto adjust, night dimming, and many more. Settings are automatically sent wirelessly to all units in the system.

Trusted for 20+ Years

With thousands of installations, Carmanah's systems are the benchmark in traffic installations and other transportation applications worldwide.



* U.S. Department of Transportation Federal Highways Administration, Report No. FHWA-SA-17-072 - "Guide for Improving Pedestrian Safety at Uncontrolled Crossing Locations"

** A photometric layout (i.e. a professional lighting plan) should be completed for each location to determine the suitability of a selected luminaire and its placement/mounting height. Contact us for a photometric layout.



Overhead Lighting for Crosswalks

Rectangular Rapid Flashing Beacon (RRFB) with Overhead Lighting Fixture


1.844.412.8395 | traffic@carmanah.com | carmanah.com



FIXTURE SPECIFICATIONS	
LED Fixture	Cree® LED Street/Area Luminaire
	NanoOptic® Precision Delivery Grid™ optic delivers site-specific customization of light quality with increased lumens, improved uniformity ratios, and controlled high-angle brightness
Performance	120-277V or 347-480V input voltage, 50/60Hz
	Up to 11,875 initial delivered lumens
	Up to 125 lumens per watt (LPW)
	Minimum 70 CRI
Optics	4000K color temperature (CCT)
	Type IV Medium (4ME)
Operation	Fixture can operate separately (using light photocell) or in conjunction with crosswalk beacons (using on-board Energy Management System)
Mounting	Mounts on 1.25" (32mm) IP, 1.66" (42mm) O.D. or 2" (51mm) IP, 2.375" (60mm) O.D. horizontal tenons (minimum 8" [203mm] in length)
Weight	Direct arm or Davit arm available for fixture mounting
	14.2 lbs (6.4 kg)

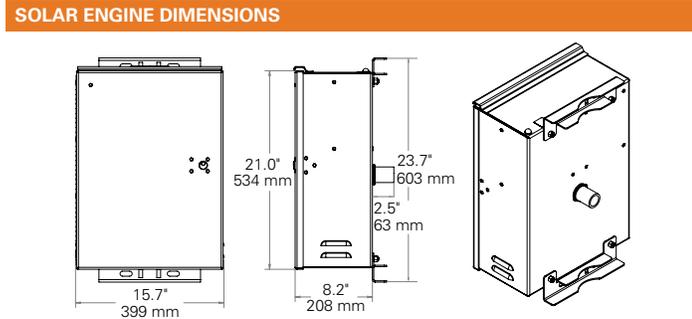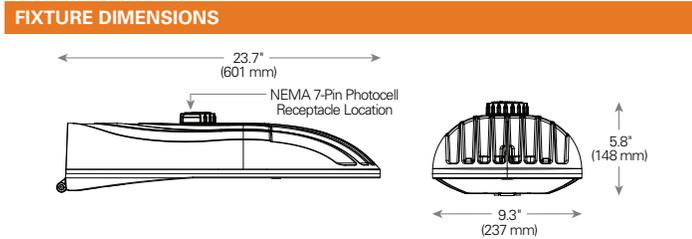

SOLAR ENGINE MOUNTING							
	4.5" Diameter Round Top of Pole Mount						
	Side of Pole Mount						
PANELS	A	B	C	D	E	F	G
20 W	-	-	-	-	13.6" (345 mm)	18.5" (470 mm)	13.8" (350 mm)
50 W	21.2" (538 mm)	26.3" (668 mm)	19.6" (497 mm)	10.0" (254 mm)	26.3" (668 mm)	21.2" (538 mm)	16.0" (405 mm)
80 W	30.7" (780 mm)	26.5" (672 mm)	19.7" (500 mm)	10.0" (254 mm)	30.7" (780 mm)	26.5" (672 mm)	19.7" (500 mm)

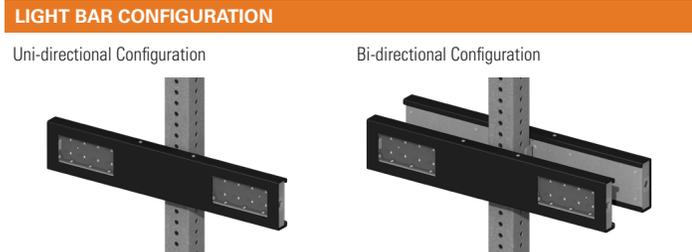

BEACON SPECIFICATIONS	
Optical	MUTCD interim approval IA-21 and MUTCDC compliant
	Purpose-built light bar optics = maximum efficiency and no stray light
	Exceeds SAE J595 class 1 intensity by 2.5 to 3x when used as recommended
	Meets SAE J578 chromaticity
Beacon Communication	3 in (76 mm) x 7 in (178 mm) clear, UV-rated polycarbonate lens with yellow LEDs
	High-power LEDs: +90% lumen maintenance (L90) based on IES LM-80
	Side-emitting pedestrian confirmation LEDs
System Specifications	Independent, stainless steel mounting brackets make back-to-back installation simple and enable in-field aiming for maximum effectiveness
	Yellow, black, or green powder coated light bar covers
	Available with 2.4 GHz radio for remote activation of additional systems
	Wireless update of settings from any unit to all systems on the same radio channel
	User-selectable multiple channels to group different beacons and ensure a robust wireless signal
	Communicates with all other Gen III radio-enabled systems including our R820-E, -F, and -G circular beacons
	Instantaneous wireless activation: <150 ms
	Wireless range: 1000 ft (305 m)
	Integrated, vandal-resistant antenna

SYSTEM SPECIFICATIONS		
On-Board User Interface (OBU)	Adjustable system settings with auto-scrolling LED display on our latest EMS	
	System test, status, and fault detection: battery, solar, button, beacon, radio, day/night	
	Flash patterns: RFB1 (WW+S), RFB2 (WSDOT), 0.5 sec. alternating (MUTCD), 0.5 sec. unison (MUTCD), 0.1 sec. unison, 0.25 sec. unison, 0.1 sec. x3 quick flashes unison, 0.1 sec. x3 quick flashes alternating	
	Input: momentary for push button activation, normally open switch, normally closed switch	
	Flash duration (for beacons and overhead light): 5 sec. to 1 hr.	
	Intensity setting: 20 to 1400 mA for multiple RRFs, circular beacons, or LED enhanced signs	
	Nighttime dimming: 10 to 100% of daytime intensity	
	Ambient Auto Adjust: increases intensity during bright daytime	
	Automatic Light Control: reduces intensity if the battery is extremely low	
	Temperature correction: yellow or red beacons	
Power System	Calendar: internal time clock function	
	Radio settings: enable/disable, selectable channel from 1 to 14	
	Output: enabled when beacons flashing daytime and nighttime, or nighttime only E.g., for relay control of overhead lighting	
	Activation counts and data reporting via OBU or optional USB connection	
	Solar or AC-powered	
	AC: 100-240 VAC input, 6-14 AWG	
	Replaceable AC-DC power supply, circuit breaker, terminal block wiring	
	Energy Collection	20, 50, or 80 W high-efficiency photovoltaic solar panel
		45 deg tilt for optimal energy collection
	Energy Storage	Maximum Power Point Tracking with Temperature Compensation (MPPT-TC) battery charger for optimal energy collection in all solar and battery conditions
12 V battery system with multiple sizes: 35, 55, 100 Ahr.		
Cabinet Construction	Replaceable, recyclable, sealed, maintenance-free, best-in-class AGM batteries offer the widest temperature range and longest life	
	Battery design life: +5 yrs.	
	Weatherproof, gasketed enclosure with vents for ambient air transfer (NEMA 3R)	
Environmental	Lockable, hinged door with #2 lock	
	Corrosion-resistant aluminum with stainless steel hardware	
	Raw aluminum finish or yellow, black, or green powder coated	
Activation	Prewired to minimize installation time	
	High-efficiency optics and EMS = the most compact, lightweight system	
	-35 to 165° F (-37 to 74° C) system operating temperature	
Warranty	-40 to 140° F (-40 to 60° C) battery operating temperature	
	150 mph (241 kph) wind speed as per AASHTO LTS-6	
	Push button: ADA-compliant, piezo-driven with visual LED and two-tone audible confirmation	
	Audible push button station: ADA-compliant, piezo-driven with visual LED and customizable voice message confirmation	
	Passive activation: microwave-based sensor detects pedestrian	
	5-year limited warranty, excluding batteries	
	Battery warranty matches selected connectivity and support plan	



Specifications subject to local environmental conditions, and may be subject to change.

All Carmanah products are manufactured in facilities that are certified to ISO quality standards.

US Patent No 6,573,659, Other patents pending.

"Carmanah" and Carmanah logo are trademarks of Carmanah Technologies Corp.

© 2021, Carmanah Technologies Corp.

Document: SPEC_TRA_SC315-G-OHL_RevB